


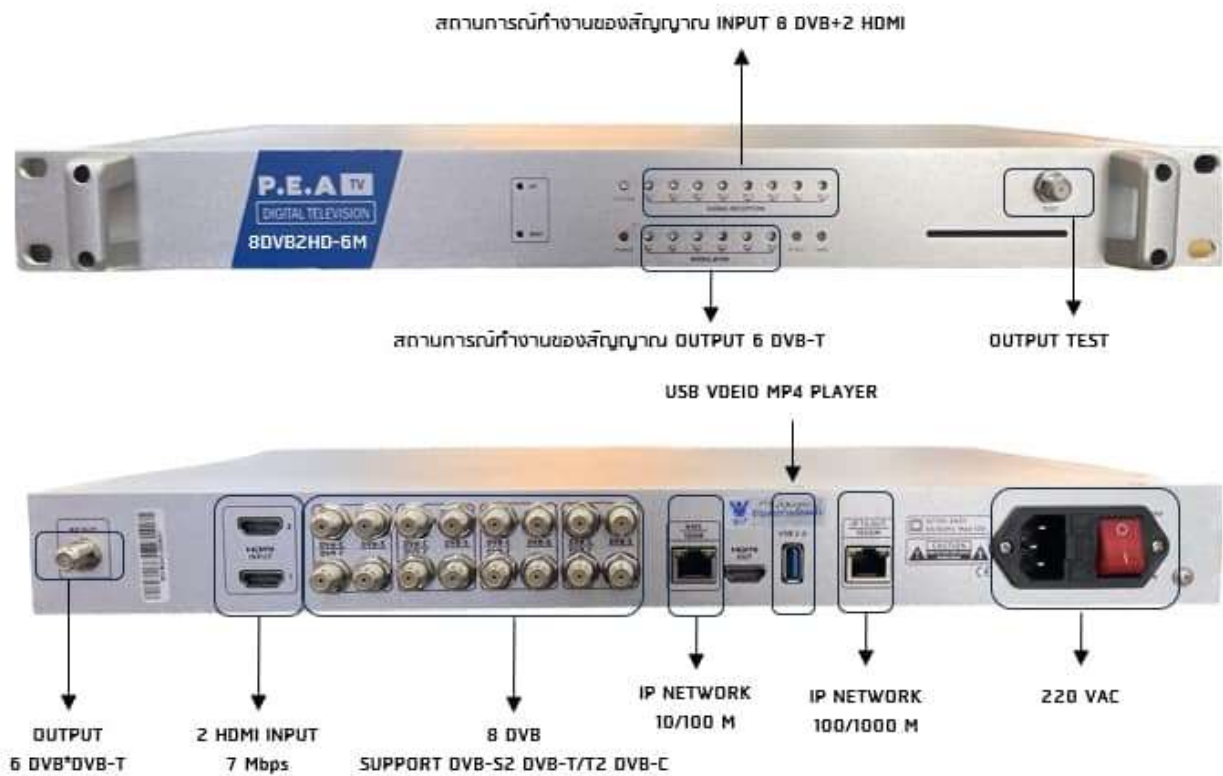

สุดยอดนวัตกรรมแปลงสัญญาณใหม่ล่าสุด เป็นอุปกรณ์รับสัญญาณจากจานดาวเทียม หรือจากปิก รับสัญญาณที่เป็นดิจิตอล จำนวน 8 จูนเนอร์ (8 Transponder) + 2 HDMI โดยนำช่องรายการแต่ละจูนเนอร์ มาแปลงสัญญาณเป็น DVB-T/C ออก 6 MUX Output ผ่าน UDP และ RTP/RTSP Protocol สามารถใส่รหัสเพื่อถอดสัญญาณ Biss Key สำหรับอินพุตจูนเนอร์

คุณสมบัติที่สำคัญ

- Support 8 FTA DVB- S/S2(DVB-T2) input + 2 HDMI
- Support BISS descrambling
- 6*DVB-T/C carrier output and 4 IP (MPTS) output over UDP and RTP protocol
- Integrated demodulating and multiplexing functions
- Support accurate PCR adjusting
- Support PID Remapping
- Support PSI/SI rebuilding and editing
- Support Web operation

Hardware	
Input	RF X8(8 Turner IN)
	HDMI X 2
Output	RF X1 (6 Channel)
Enthernet	RJ45 X2
Power	AC100~220
USB	USB 2.0 X1
CA	CA X1
RF INPUT	
Standar	
DVB-S	ETSI EN 300-421 V1.1.2
DVB-S2	ETSI EN 302-307 V1.2.1
DVB-T2/T2-Lite	ETSI EN 302-755 V1.3.1
DVB-T	ETSI EN 300-744 V1.6.1
DVB-C	ETSI EN 300-429 V1.2.1
HDMI	HDMI1.4
PART1: DVB-S/S2	
Symbol rate	1M ~45M Ksym/s
RollOff	0.35/0.25/0.2
Constellation	DVB-S2 :8PSK/QPSK DVB-S: QPSK
Coderate	(DVB-S2:8PSK) 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 (DVB-S2:QPSK) 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 4/5, 5/6, 8/9, 9/10 (DVB-S: QPSK) 1/2, 2/3, 3/4, 5/6, 7/8
PART2: DVB-T2	
BandWidth	5MHz, 6MHz, 7MHz, 8MHz
FFT Size	1K, 2K, 8K, 4K, 16K, 32K
Constellation	16QAM, 32QAM, 64QAM, 128QAM, 256QAM
Coderate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6
PLPs	Single and mutiple-PLPs
PART3: DVB-T	
BandWidth	6MHz, 7MHz, 8MHz
FFT Size	2K, 8K
Constellation	QPSK, 16QAM, 64QAM
Coderate	1/2, 2/3, 3/4, 5/6, 7/8
PART4: DVB-C	
Symbol rate	1.7 ~ 7.2Msym/s
RollOff	0.15
Constellation	16, 32, 64, 128 and 256QAM

PART5: HDMI	
Solution	up to 1080p
Encoder	H.264/AVC
RF OUT	
Standar	
DVB-C	ETSI EN 300-429 v1.2.1
DVB-T	ETSI EN 300-744 V1.6.1
PART1: DVB-T	
BandWidth	6MHz, 7MHz, 8MHz
FFT Size	2K, 8K
Constellation	64QAM
PART2: DVB-C	
Symbol rate	1.7 ~ 7Msym/s
Constellation	64, 128 and 256QAM
Satellite Signal	
Connector	F-Type
Input Frequency	950~2150
Input Level	-80~-10dBm
LNB Power supply	14V / 18V / OFF, I _{max} 350mA
Port Switch	DisEqc 1.0, DisEqc 1.1,
Terrestrial/Cable Signal	
Connector	F-Type
Input Frequency	50M~900MHz
Input Level	-79~-10dBm(T), 0~ -67dBm(C)
Upgrade/Editor	
Connector	RJ45
Funciton	system config RF Input setting RF Output setting IP
Power	
Adapter	12V/8.5A
Power consumption	Max 100W
Physical Characteristics	
Size(W*D*H)	240*200*50